



टीकापुर नगरपालिका

# नगर कार्यपालिकाको कार्यालय

टीकापुर, कैलाली,  
सुदूरपश्चिम. प्रदेश, नेपाल



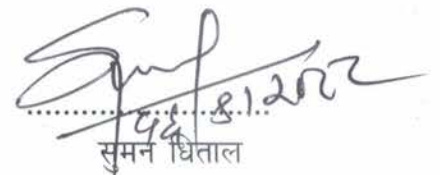
## दरभाउपत्र पेश गर्ने सम्बन्धी सूचना

प्रथम पटक प्रकाशित मिति: २०८२।०९।१६

१. टीकापुर नगरपालिकाको स्वीकृत वार्षिक कार्यक्रम अनुसार तपसिल बमोजिमको कार्य खुला दरभाउपत्र मार्फत गर्नुपर्ने भएकाले ईच्छुक निर्माण व्यवसायीले यो सूचना प्रकाशित भएको मितिले ७ दिन भित्र दरभाउपत्र टीकापुर नगरपालिका, नगर कार्यपालिकाको कार्यालयमा पेश गर्नुहुन यो सूचना प्रकाशित गरिएको छ।

क्र.सं.	कामको विवरण	लागत अनुमान रकम	दर-भाउ पेश गर्ने अन्तिम समय	कैफियत
१	खक्रौला सडकको क्यारीमा तारजाली निर्माण कार्य, टीकापुर नगरपालिका वडा नं. १	६९९९९९।७७ (मु.अ.कर समेत)	मिति २०८२।०९।२२ (कार्यालय समय भित्र)	

२. दरभाउपत्र पेश गर्ने निर्माण व्यवसायीले अनिवार्य रूपमा दरभाउपत्र पेश गर्ने व्यहोरा सम्बन्धको लिखित निवेदन सहित नविकरण भएको फर्म/कम्पनी दर्ता प्रमाण पत्रको प्रतिलिपी, मु.अ.कर दर्ता प्रमाण पत्रको प्रतिलिपी, नविकरण भएको निर्माण व्यवसायी ईजाजतपत्रको प्रतिलिपी, चालु आ.व.को लागी टीकापुर नगरपालिकामा सुचिकृत भएको निस्साको प्रतिलिपी र आ.व. २०८१/०८२ को करचुक्ता प्रमाणपत्रको प्रतिलिपी वा म्याद थपको स्वीकृतिको पत्रको प्रतिलिपी संलग्न गरी पेश गर्नुपर्ने छ।
३. उक्त कार्यको लागि आवश्यक BOQ यस कार्यालयको वेबसाइट <http://www.tikapurmun.gov.np> बाट डाउनलोड गर्न सकिनेछ।
४. BOQ मा आफुले कबोल गरेको रकम अंक र अक्षरमा स्पष्ट बुझिने गरी लेखेर पेश गर्नु पर्नेछ। केरमेट भएको दरभाउपत्र (BOQ) मुल्याङ्कनमा समावेस गरिने छैन।
५. दरभाउपत्र पेश गर्ने अन्तिम दिन सार्वजनिक विदा पर्न गएमा सो दिनको भोली पल्ट कार्यालय समयभित्र दरभाउपत्र पेश गर्न सकिनेछ।
६. म्याद नाघी आएको, रित नपुगेको वा कुनै शर्त राखी पेश गरेको दरभाउपत्र मान्य हुने छैन।
७. माथि उल्लेखित बाहेक प्रचलित ऐन कानून बमोजिम हुनेछ।

  
सुमन धिताल

प्रमुख प्रशासकीय अधिकृत  
प्रमुख प्रशासकीय अधिकृत



Tikapur Municipality  
**Office of the Municipal Executive**

Tikapur, Kailali  
Sudurpaschim Province

**BILL OF QUANTITY**

Name of Project :

Location :

Fiscal Year:

Contract ID

Traffic island Fencing works  
Khakraula road, Tikapur-01, Kailali  
2082/083



*[Signature]*  
इन्जिनियर

A. The rate quoted here under shall be inclusive of :

1. Supplying the materials along with accessories to the site .

2. Fixing and erecting them in position as per general practice, specifications and instructions of site Engineer

3. Test & Maintenance up to the period, specified in the agreement

B. The itemwise rate should be quoted without VAT

S.No.	Discription of works	Unit	Quantity	Rate excluding VAT		Total Amount	Remarks
				In figure	In words		
1	Earthwork excavation in ordinary soil in foundation including stacking the soil 4 m from the edge of the foundation and 30m hauling distance and 3m lift all complete	Cu.m	13.23				
2	Providing and laying uncoursed hand packed Dry Rubble Stone soling in foundation,floors of building, retaining wall,steps and ramps with out any special dressing of stone including filling interstices with suitable quarry waste or stone chips or quarry sand, watering, compacting using appropriate mechanical compaction means with all contractors materials, handling, placing etc. all complete as per drawings, specifications and instruction of the Engineer. The complete item including all lead & lift.	Cu.m	3.97				

Name Of Firm/Company: .....

Authorized Signature: .....

Firm/Company Stamp: .....



**Tikapur Municipality**  
**Office of the Municipal Executive**  
Tikapur, Kailali  
Sudurpaschim Province

**BILL OF QUANTITY**

**Name of Project :**

**Location :**

**Fiscal Year:**

**Contract ID**

**Traffic island Fencing works**

**Khakraula road, Tikapur-01, Kailali**

**2082/083**



*Handwritten signature*  
**इन्जिनियर**

A. The rate quoted here under shall be inclusive of :

1. Supplying the materials along with accessories to the site .

2. Fixing and erecting them in position as per general practice, specifications and instructions of site Engineer

3. Test & Maintenance up to the period, specified in the agreement

B. The itemwise rate should be quoted without VAT

S.No.	Discription of works	Unit	Quantity	Rate excluding VAT		Total Amount	Remarks
				In figure	In words		
3	Providing and laying machine mixed Plain Cement Concrete of nominal mix 1:2:4 (1 cement : 2 sand : 4 coarse aggregate ) for foundation, etc. in all level with broken stone aggregate of size not more than 25 mm of approved quality including formwork wherever necessary, dewatering, batching, mixing, transporting, placing, compacting, curing, including all lead and lift, etc. all complete as per drawings, specifications and the instructions of the Engineer.	Cu.m	9.26				
4	Supplying and Fixing MS Square pipe for vertical post, Gates as required with two numbers of hold fast on bottom and prism/cone shape cap on top including one coat metal primer and two coat of enamel paint all complete as per instruction of engineer.	Kg	1582.79				

Name Of Firm/Company:

Authorized Signature:

Firm/Company Stamp:





Tikapur Municipality  
**Office of the Municipal Executive**

Tikapur, Kailali  
Sudurpaschim Province

**BILL OF QUANTITY**

Traffic island Fencing works  
Khakraula road, Tikapur-01, Kailali  
2082/083



*[Signature]*  
इन्जिनियर

Name of Project :

Location :

Fiscal Year:

Contract ID

A. The rate quoted here under shall be inclusive of :

1. Supplying the materials along with accessories to the site .

2. Fixing and erecting them in position as per general practice, specifications and instructions of site Engineer

3. Test & Maintenance up to the period, specified in the agreement

B. The itemwise rate should be quoted without VAT

S.No.	Discription of works	Unit	Quantity	Rate excluding VAT		Total Amount	Remarks
				In figure	In words		
5	Providing and fixing in machine made GI Fence 3"x3" size diamond shape with 10 SWG GI wire all complete as per instruction of engineer.	Sqm	536.40				
6	Providing and Fixing 8 SWG GI Wire on Top of the fence & 10 SWG GI wire for tightening mesh all complete as per instruction of engineer	KG	59.20				
Sub Total							
VAT 13%							
Grand Total							
Grand Total amount in Words:							

Name Of Firm/Company:

Authorized Signature:

Firm/Company Stamp: